

โซลินอยด์เบรก




Spec.



รหัส	SOLENOID	PUSH OR PULL	RATED STROKE (mm)	RATED PULL (KG)	RATE SERVICE	RATE VOLTAGE (AC)	RATE CYCLES	LxWxH	PLUNGER WEIGHT (kg)	TOTAL WEIGHT (kg)	ราคา
SN101	TAS-5 220V	Push Pull Combined	15	1	Continuous	220 V	50/60 HZ	93x49x50	0.114	0.40	830
SN104	TAS-10 220V		15	1.5				93x53x50	0.138	0.45	862
SN102	TAS-15 220V		15	2				93x57x50	0.153	0.50	1,035
SN103	TAS-30 220V		20	5				130x80x63	0.393	1.45	1,955

สวิตช์แสงแดด

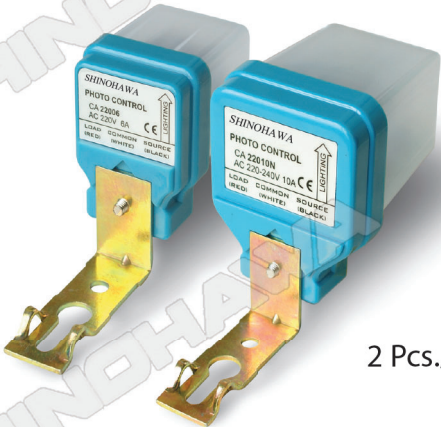

2 Pcs./Box

SHINOHAWA

- CA-03 220V 3 A , 295- (AL003)
- CA-06 220V 6 A, 310- (AL004)
- CA-10 220V 10A, 525- (AL010)
- CA-15 220V 15A, 565- (AL009)

SAZN



2 Pcs./Box

- SAZN 12V DC 10A, 250- (AL020)
- SAZN 12V DC 15A, 300- (AL021)
- SAZN 24V DC 10A, 250- (AL024)
- SAZN 24V DC 15A, 300- (AL025)
- SAZN 220V AC 10A, 275- (AL028)
- SAZN 220V AC 15A, 330- (AL029)