


ลูกถ้วยฉนวนแรงสูง



| รุ่น          | รหัส  | ราคา   |
|---------------|-------|--------|
| EL-3S         | BI010 | 600-   |
| EL-6S (V6090) | BI015 | 700-   |
| EL-3M         | BI008 | 700-   |
| ET-12         | BI016 | 750-   |
| EL-6M         | BI007 | 890-   |
| EL-12         | BI006 | 1,400- |
| EL-15         | BI005 | 1,200- |
| EL-24         | BI004 | 2,300- |
| EL-25         | BI012 | 2,300- |
| EL-10H        | BI009 | 3,200- |
| EL-20N        | BI013 | 5,000- |
| EL-30N        | BI011 | 9,700- |

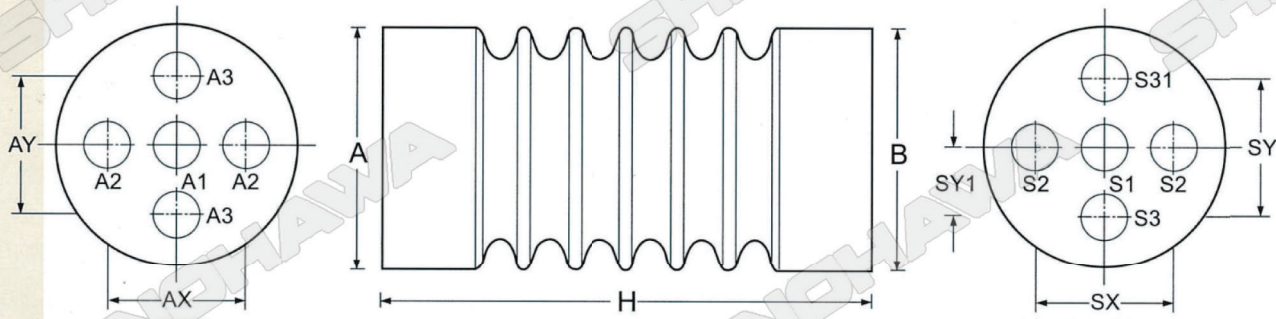

| Part.No.    |                                      | EL-30N | EL-20N | EL-10N | EL-10H | EL-25 | EL-24 | EL-15 | EL-12 | EL-6M | EL-3M | V6090<br>(EL-6S) | EL-3S |
|-------------|--------------------------------------|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|------------------|-------|
| (A/B),mm    | End diameters(A/B),mm                | 100    | 85/90  | 75/80  | 75/80  | 70    | 70    | 70    | 58    | 70    | 70    | 60               | 50    |
| (H),mm      | Height(H),mm                         | 310    | 210    | 145    | 115    | 230   | 210   | 142   | 130   | 90    | 60    | 90               | 50    |
| mm          | Surface leakage distance,mm          | 630    | 330    | 240    | 190    | 375   | 356   | 210   | 172   | 125   | 88    | 140              | 65    |
| kV          | Rated voltage,kV                     | 36     | 22     | 16.5   | 12     | 25    | 24    | 15    | 12    | 7.2   | 3.6   | 8.5              | 3.6   |
| kV          | Low frequency dielectric strenght,kV | 75     | 50     | 36     | 28     | 60    | 60    | 50    | 36    | 22    | 16    |                  | 16    |
| kV          | Impulse voltage resistance,kV        | 200    | 125    | 95     | 75     | 150   | 125   | 110   | 95    | 75    | 60    |                  | 45    |
| kg          | Presistent bending strength.1 min.kg | 500    | 600    | 600    | 600    | 300   | 300   | 400   | 300   | 400   | 400   |                  | 150   |
| kg          | Tensile strength,kg                  | >3000  | >2000  | >2000  | >2000  | >2000 | >1500 | >1500 | >2000 | >1200 | >1200 |                  | >1000 |
| kg-m        | Torque strength,kg-m                 | >25    | >25    | >25    | >25    | >25   | >25   | >25   | >25   | >25   | >25   |                  | >20   |
| INSERTS     | TOP                                  | A1     | M16    | M10    | M10    | -     | -     | M8    | M10   | M10   | M10   | M10              | -     |
|             |                                      | A2     | M8     | M8     | M8     | M8    | M10   | -     | -     | M8    | M8    | M8               | M6    |
|             |                                      | A3     | -      | M10    | M10    | M10   | M10   | M8    | M8    | -     | -     | -                | -     |
|             |                                      | AX     | 40     | 34     | 34     | 34    | 40    | -     | -     | 36    | 40    | 40               | -     |
|             |                                      | AY     | -      | 40     | 40     | 40    | 40    | -     | 40    | -     | -     | -                | 36    |
| ARRANGEMENT | BOTTOM                               | S1     | M16    | -      | -      | -     | -     | M8    | M16   | M16   | M10   | M10              | M12   |
|             |                                      | S2     | -      | M10    | M10    | M10   | -     | -     | -     | -     | -     | -                | -     |
|             |                                      | S3     | M4     | M10    | M10    | -     | M10   | -     | -     | -     | -     | -                | -     |
|             |                                      | S31    | -      | M10    | M10    | -     | M10   | -     | -     | -     | -     | -                | -     |
|             |                                      | SX     | -      | 40     | 40     | 40    | -     | -     | -     | -     | -     | -                | -     |
|             |                                      | SY     | -      | 40     | 40     | -     | 40    | -     | -     | -     | -     | -                | -     |
|             |                                      | SY1    | 30     | -      | -      | -     | -     | -     | -     | -     | -     | -                | -     |