

เครื่องชาร์ตแบตเตอรี่




มีไฟ LED แสดงสถานะการทำงาน

ตัดอัตโนมัติ เมื่อ แบตเตอรี่เต็มให้ติด สายวัดอุณหภูมิที่ข้างตัวแบตเตอรี่ เพื่อป้องกันแบตเตอรี่ร้อนจัด

รุ่น	ENC1220	ENC2410
ราคา	3,800 บาท	3,800 บาท
รหัส	BC002	BC006
Input voltage	220V AC (190V - 265V)	
Output voltage	12V	24V
Output floating voltage	13.6-13.95V	27.3-27.9V
Output current	20A	10A
Efficiency	230V >= 87%	
Protect Function	Short Circuit , Overload , Over heat , Over charge กรณีต่อขั้วแบตเตอรี่ (พิวส์ขาด) ต้องเปลี่ยนพิวส์	

Switch Power Supply

S-Series

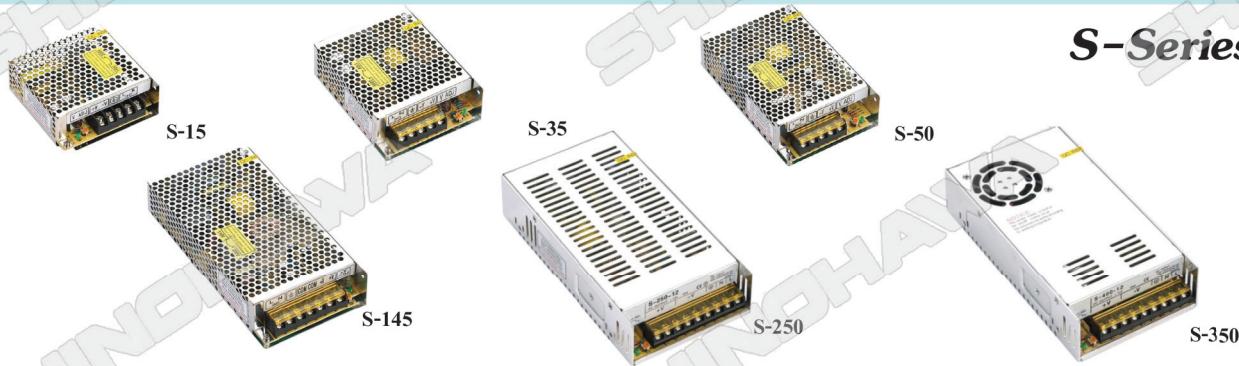

	รุ่น	S-350-12	S-350-24	S-250-12	S-250-24	S-145-12	S-145-24	S-50-12	S-50-24	S-35-12	S-35-24	S-15-12	S-15-24
	รหัส		SS322	SS321	SS320	SS310	SS307	SS305	SS306	SS303	SS304	SS301	SS302
	ราคา		5600	5000	5000	3330	3330	2335	2335	2000	2000	1670	1670
Output	DC voltage	12V	24V	12V	24V	12V	24V	12V	24V	12V	24V	12V	24V
	Rated current	29A	14.6A	20A	10A	12A	6A	4.2A	2.1A	3A	1.5A	1.3A	0.7A
	Rated power	348W	350.4W	240W	240W	144W	144W	50.4W	50.4W	36W	36W	15.6W	16.8W
	Ripple&noise	150mvp-p	150mvp-p	120mvp-p	150mvp-p	150mvp-p	150mvp-p	120mvp-p	120mvp-p	120mvp-p	120mvp-p	100mvp-p	120mvp-p
	DCvoltage ADJ.range	±10%	±10%	±10%	±10%	±10%	±10%	±10%	±10%	±10%	±10%	±10%	±10%
Input	Voltage range	90~132VAC/180~264VAC(selected by switch), 255~373VDC											
	Frequency	47~63Hz											
	AC current	6.5A/115VAC, 4.0A/230VAC		5.0A/115VAC, 2.5A/230VAC		3.2A/115VAC 1.6A/230VAC		1.3A/115VAC 0.65A/230VAC		0.8A/115VAC 0.45A/230VAC		0.5A/115VAC 0.25A/230VAC	
	Efficiency	80%	82%	80%	82%	80%	82%	79%	80%	76%	78%	70%	74%
	Inrush current	cold start current 25A/115VAC, 50A/230VAC					cold start current 18A/115VAC, 36A/230VAC						
	Leakage current	< 3.5mA/240VAC											
Protection	Overload	above 105%~135% rated power					above 115%~150% rated power						
		protection type: rated current limit, auto-recovery after fault condition is removed											
	Over voltage	15.6~17.8V	30.6~33.2V	15.6~17.8V	30.6~33.2V	15.6~17.8V	30.6~33.2V	-					
		protection type : hiccup mode, auto-recovery after fault condition is removed						-					
	Over temperature	≥55 fan on, ≤50fan off ≥85 shutoff O/P		≥85 shutoff O/P		-							
		protection mode: cutoff output, auto-recovery after					-						
Others	Dimension	215*115*50mm (L*W*H)		215*115*50mm (L*W*H)		199*98*38mm (L*W*H)		159*97*38mm (L*W*H)		129*98*38mm (L*W*H)		99*97*35mm (L*W*H)	
	Weight/packing	1 kg		0.9kg		0.7kg		0.5Kg		0.4kg		0.3kg	