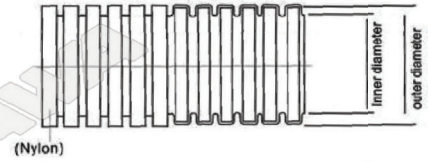


ท่ออ่อนดำ, ท่ออ่อนดำผ่า PE, PP

**- Product material : PE (Polyethylene)**

- Working temperature : -30°C - $+100^{\circ}\text{C}$, $+120^{\circ}\text{C}$ can be reached but kept only for a short time
- Property : Good flexibility, smooth and bright surface, chemical corrosion resistant
- Application : It can be used in machineries, electric equipment, foodstuff machineries, automatic meters and gauges, motors, protecting the cables from abrasion and providing insulation to the wires and cables.

- Product material : PP (Polypropylene) (ไม่เป็นเชื้อไฟ)

- Working temperature : -30°C - $+100^{\circ}\text{C}$, $+110^{\circ}\text{C}$ can be reached but kept only for a short time
- Property : Good flexibility, smooth and bright surface, chemical corrosion resistant
- Application : Mainly used in automobiles wiring, but it can also be used in machineries, automatic meters and gauges, motors, protecting the cables from abrasion and providing insulation to the wires and cables

ขนาด 1/4" - 2" เป็น PP / ขนาด 2 1/2" - 4" เป็น PE

	ขนาด	เส้นผ่านศูนย์กลาง	เส้นผ่านศูนย์กลาง	ความยาว	แบบไม่ผ่า		แบบไม่ผ่า		แบบผ่า		แบบผ่า	
		(มม.) โตใน x โตนอก	(ซม.) ตัววงเล็กสุดได้		(เมตร)	รหัส สินค้า	ราคา (เมตร)	รหัส สินค้า	ราคา (ม้วน)	รหัส สินค้า	ราคา (เมตร)	รหัส สินค้า
PP	1/4"	6.5 x 10	16	300	PC102	14.69	PC302	4,005	PC500	17.12	PC515	4,668
	5/16"	10 x 13	4	100	PC104	14.69	PC304	1,335	PC501	17.12	PC508	1,556
	3/8"	12 x 15.8	6	100	PC105	17.12	PC305	1,556	PC502	19.56	PC509	1,778
	1/2"	17 x 21.2	9	100	PC107	23.22	PC307	2,111	PC503	26.88	PC510	2,444
	3/4"	23 x 28.5	10	50	PC109	39.12	PC309	1,778	PC504	45.22	PC511	2,056
	1"	29 x 34.5	12	50	PC110	47.66	PC310	2,167	PC505	58.66	PC512	2,667
	1 1/4"	36 x 42.5	14	50	PC111	99	PC311	4,500	PC506	116	PC513	5,250
	2"	48 x 54.5	18	25	PC112	367	PC312	8,350	PC507	422	PC514	9,600
PE	2 1/2"	63 x 74	26	10	PC113	638						
	3"	76 x 88	34	10	PC114	1,064						
	4"	94 x 108	45	10	PC115	1,408						