

## เครื่องควบคุมอุณหภูมิ TC-72 และ TC-72N



200°C , 400°C


Type K หรือ PT-100

ควบคุมอุณหภูมิ	TYPE	รหัส	ราคา
TC-72 200°C RKC	K แกมสายวัด เฉพาะ TYPE K	TC030	2,100
TC-72 400°C RKC		TC029	2,100
TC-72N 200°C RKC		TC033	4,000
TC-72N 400°C RKC		TC032	4,000
TC-72 200°C PT100	PT100 (ไม่แกมสาย)	TC035	2,100
TC-72 400°C PT100		TC034	2,100
TC-72N 200°C PT100		TC037	4,000
TC-72N 400°C PT100		TC036	4,000


### CHARACTERISTICS

Setting accuracy	±1.5% max. of full scale
Indication accuracy	TC-72N ±1.5% max. of full scale TC-72 ±2.5%
Hysteresis	0.2% of full scale (fixed)
Control output	
PD setting range	Proportional hand (P) 1-3% of full scale
	Rate time (D) 30 ± 10S

### CONNECTIONS: TC-72 & TC-72N

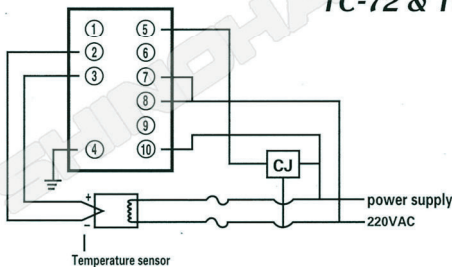

### DIMENSIONS/mm: TC-72 & TC-72N

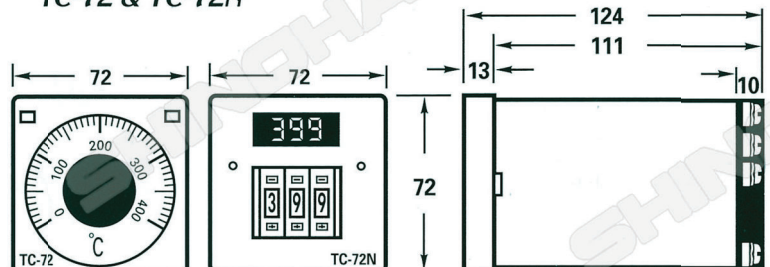

- MODEL NO. TC-72 NON DEVIATION INDICATOR TEMPERATURE CONTROLLER.
- MODEL NO. TC-72N FULL DEVIATION TEMPERATURE CONTROLLER. (DIGITAL DISPLAY).
- TC-72 & TC-72N DIN SIZE (72x72mm) TEMPERATURE CONTROLLER WITH P.D. FUNCTION.

### SPECIFICATIONS: TC-72 & TC-72N


- Supply voltage: 110/220V AC 50/ 60Hz
- Operating voltage: 90% to 110% of rated voltage.
- Power consumption: TC-72, Approx <2VA  
TC-72N, Approx <5VA
- Temperature sensor: K, E, J, T, PT-100
- Standard scale range: TC-72: 0-400 (DEGREE C)  
TC-72N: 0-199, 0-399, 0-999 (DEGREE C)

### STANDARD ACCESSORY

- 1 Piece Thermocouple Wire When Temperature Under 600 Degree C CA (K) Type.
- Thermocouple Wire Length: 2M.



### Dimension เจาะหน้าตู้



สายวัดอุณหภูมิได้  
ไม่เกิน 600° C